

TVS AF 5775 FRICTION DATA SHEET

DESCRIPTION AND CHARACTERISTICS

Asbestos free rigid moulded friction material specially formulated for Passenger car and Multi Utility Vehicle applications



PRODUCT FEATURES

Good brake feel

Good lining life

Minimum drum wear

Exceptional value for money

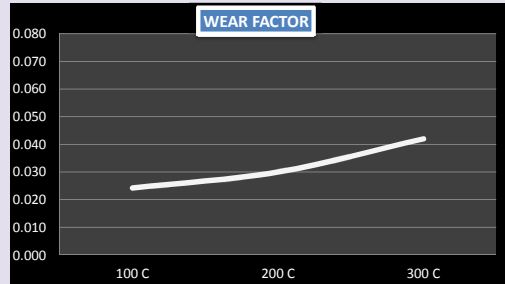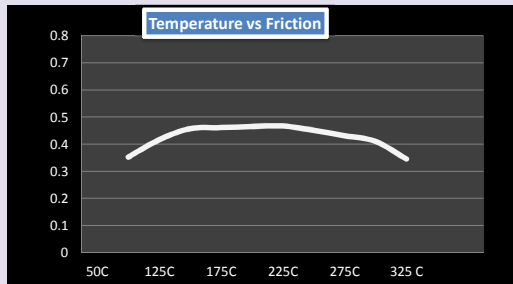

Physical	<ul style="list-style-type: none"> • Specific gravity : 1.90 - 2.10 • Rockwell "L" : 50 - 100
Mechanical	<ul style="list-style-type: none"> • Cross Breaking strength: 300 Kg/sq.cm Shear • strength : 95 kg/sq.cm
Frictional	<ul style="list-style-type: none"> • F F RATING

DYNAMOMETER TEST RESULT:

Tested on LINK USA Dynamometer Model D 1900

Test Inertia : 6.25 kg.m.sec²

Test Speed : 80 kmph

Test Pressure : 75 bar

Performance - Brake Factor : 2.39